


MW Macro ActiveX

Features

- 48 reed relays which can be controlled individually.
- Relay can be ON, OFF, ON-OFF-ON and OFF-ON-OFF

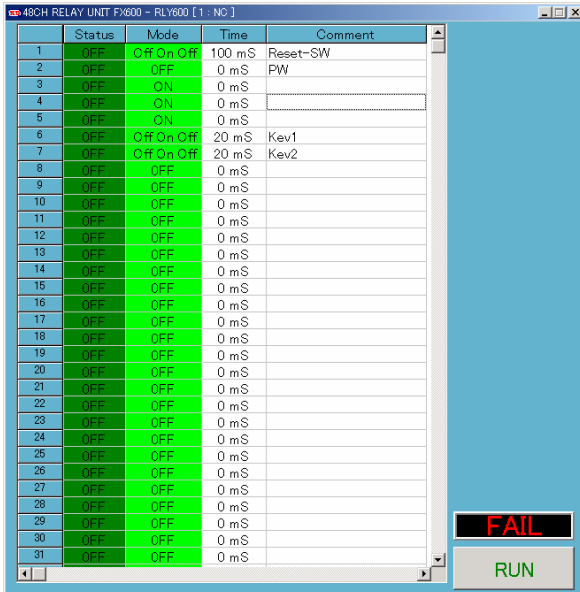

Example of use

As an ON/OFF switch for an automatic control system
As a multi-point input switch to the FX300

Can be controlled from the FX300!

Specification

Description	Details	Remarks
Contact point mechanism	Single	
Contact point loaded rating (AC)	AC125V 0.5A	
Contact point loaded rating (DC)	DC100V 0.5A	
ON resistance	180m Ω (MAX)	Initial value
Turn-on time (SET)	≤ 1mS	
Turn-off time (RESET)	≤ 0.5mS	
Isolation resistance	≥ 100MΩ (DC100V)	
Withstand voltage of control part	100V (AC)	
Contact point open/close durability	≥ 1.5x10 ⁹ openings (When load rated)	