

MW Macro

ActiveX

## Features


- 48 Photo MOS relays which can be controlled individually.
- Relay can be ON, OFF, ON-OFF-ON and OFF-ON-OFF



### Example of product use

As an ON/OFF switch for an automatic control system  
 As a multi-point input switch to the FX300

Can be controlled from the FX300!

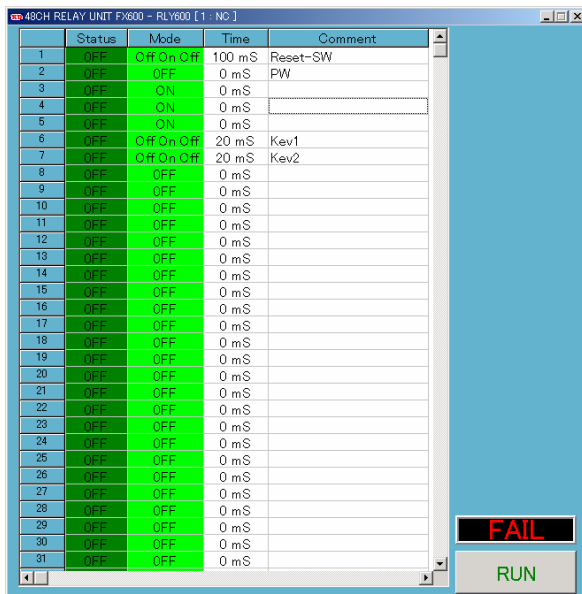

## Specification

Description	Details	Remarks
Contact point mechanism	Single	
Open/close voltage rating	40V (GND to PEAK)	
Current rating	0.30A (Typ. 20°C) 0.15A (Typ. 80°C)	Changes with ambient temperature
ON resistance	3Ω (MAX)	
Turn-on time (SET)	1.0mS (Typ.)	
Turn-off time (RESET)	0.1mS (Typ.)	
Isolation resistance	≥ 100MΩ	
Withstand voltage of control part	100V (AC)	