


# QP-02


SERIES PRECISION PROBES

m. m. (Dimensions in millimeter)

# 50 mil

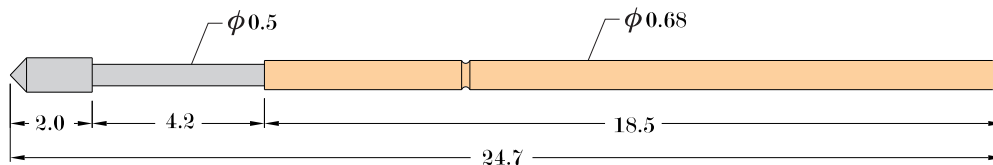

**QP-02A1**

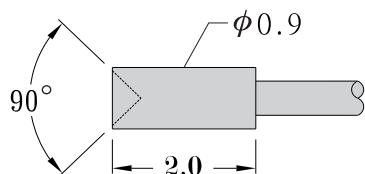

Plunger

Heat-Treated Beryllium Copper with Rhodium Plated Over Hard Nickel

Barrel

Phosphor Bronze with Gold Plated


Spring

Music Wire with Gold Plated


Receptacle

Phosphor Bronze with Gold Plated


**QP-02B**

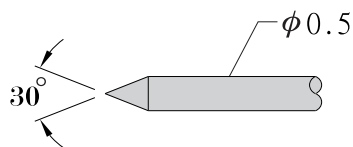


**QP-02D**




**QP-02E1**

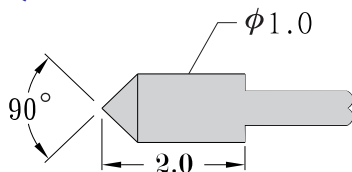


**QP-02E2**

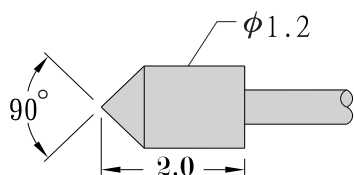

**QP-02F**

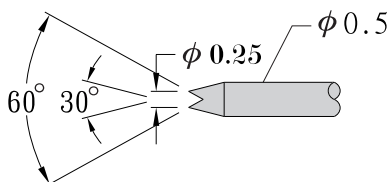

**QP-02H**



Min .Center

Full Stroke

Full Stroke Spring Force  
(±20%)

2/3 Stroke Spring Force  
(±20%)

Current Rating

Contact Resistance

Recommended Hole Size

1.27mm

4.20mm

150g

100g

3A

30mΩ

0.95mm

Specification subject to change without notice