


QP-62


SERIES PRECISION PROBES

m. m. (Dimensions in millimeter)


50 mil




QP-62B




QP-62F



QP-62H




QP-62T



Plunger	Heat-Treated Beryllium Copper with Rhodium Plated Over Hard Nickel
Barrel	Phosphor Bronze with Gold Plated
Spring	Music Wire with Gold Plated
Receptacle	Phosphor Bronze with Gold Plated

QR-62W

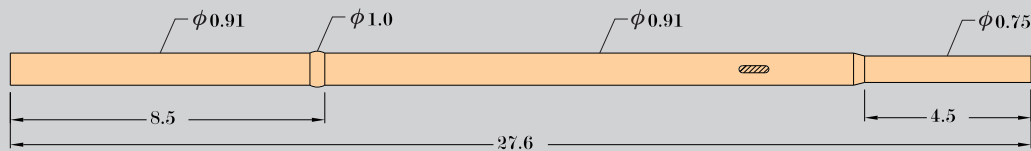

Min .Center	Full Stroke	Full Stroke Spring Force (±20%)	2/3 Stroke Spring Force (±20%)	Current Rating	Contact Resistance	Recommended Hole Size
1.27mm	4.70mm	120g	80g	3A	30m Ω	0.95mm

Specification subject to change without notice