


QSP-11


SERIES PRECISION PROBES

m. m. (Dimensions in millimeter)


156 mil

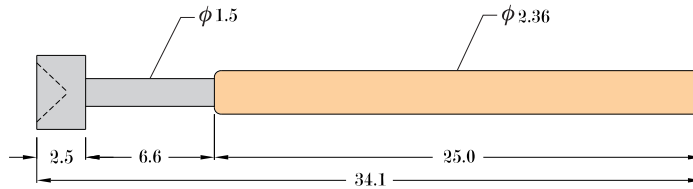


QSP-11A




QSP-11B



QSP-11F




QSP-11H




Plunger	Heat-Treated Beryllium Copper with Rhodium Plated Over Hard Nickel
Barrel	Brass with Gold Plated
Spring	Stainless Steel
Receptacle	Brass with Gold Plated

QSR-11W1

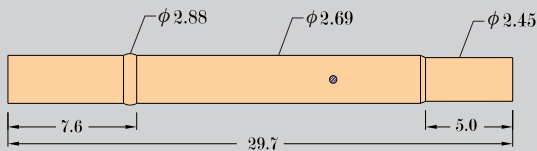

QSR-11V1

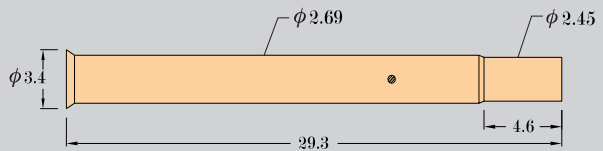

Min .Center	Full Stroke	Full Stroke Spring Force (±20%)	2/3 Stroke Spring Force (±20%)	Current Rating	Contact Resistance	Connections	Recommended Hole Size
3.97mm	6.60mm	150g	110g	5A	30mΩ	Solder	2.7mm-2.75mm

Specification subject to change without notice